


Portable Reciprocating Saws Air • Hydraulic

Hand-held or clamp-on cutting in tough environments

Ideal for a wide range of industries, including subsea, gas utilities, offshore oil, petrochemical, power generation, industrial plant maintenance and construction


- Fast cutting of pipe, structural steel, bolts, nails, pallets and other material
- The best power-to-weight ratios in the industry; compact size for cutting in confined spaces
- Accessories include wide variety of heavy-duty blades and clamps for 90° cuts



1.3 HP, Cuts steel pipe and channel 1/2" to 4" dia., plastic pipe to 8" dia.



1.6 HP, Cuts steel pipe and channel 1/2" to 6" dia., plastic pipe to 8" dia.

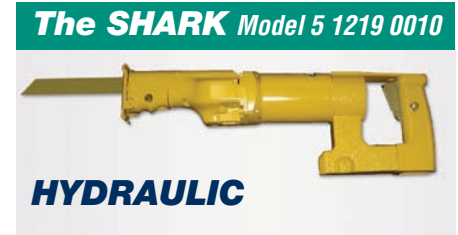

2 HP, cuts pipe up to 6" dia., wood up to 8" dia., metal plate up to 3/4" dia.

| Model Number | Motor Specifications | Stroke Length | Strokes per Minute | Connection | Length | Weight (lbs.) |
|------------------------------|--|---------------|--------------------|-------------------|---------|---------------|
| The CAT – Pneumatic | | | | | | |
| 5 1217 0020 | 1.3 HP, 46CFM @ 90 PSI | 1-1/8" | 0-1800 | 1/2" NPT (ID) | 15-7/8" | 9 |
| The WOLF – Pneumatic | | | | | | |
| 5 6005 0010 | 1.6 HP, 51CFM @ 90 PSI | 1-1/8" | 0-2200 | 1/2" NPT (ID) | 17-3/4" | 10.75 |
| The SHARK – Hydraulic | | | | | | |
| 5 1219 0010 | 2 HP, Oil Pressure 2000 PSI, Oil Flow 6 GPM (up to 13 GPM) | | 1700 | M 18 x 1.5 Female | | 13.2 |


Low Vibration/Low Air Volume – Compact, Quiet & Reliable

Cut Pipe, Structural Steel, Sheet Metal, Fiberglass, Plastic and More

Workhorses for use in the fabrication, shipbuilding, ship repair, oil and petrochemical, boat building and aircraft maintenance fields, as well as by fire and rescue professionals



- Piston air motors use low air volume while maintaining a cutting speed of 1200 to 2000 strokes per minute
- For use in hazardous areas and around gas and other flammable materials
- Heavy-duty cast steel and aluminum saw bodies; built-in motor lubrication
- Safety STOP/Isolator button disconnects air supply
- Variety of Cengar Air Saw blades available

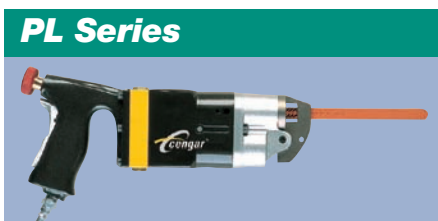

Optional inside trigger for hand-held use only. Add FT to Model No.*

| Model No. | Trigger | Motor Power | Stroke Length | Strokes per minute | Dimensions (LxHxW) | Weight (lbs.) | CFM @ 90 PSI | Connection | Noise Level db(A) | Vibration Levels m/s ² |
|-----------|---------|-------------|---------------|--------------------|--|---------------|--------------|-------------|-------------------|-----------------------------------|
| PL905 | Outside | 1 HP | 7/8" | 2000 | 11 ³ / ₄ " x 5 ¹ / ₄ " x 1 ⁵ / ₈ " | 5.25 | 4 | 1/2" NPT ID | 69 | 1.73 |
| CL50 | Outside | 1 HP | 1-3/4" | 1200 | 15 ³ / ₄ " x 5 ¹ / ₄ " x 1 ⁵ / ₈ " | 5.5 | 5.75 | 1/2" NPT ID | 83 | 3.69 |
| CL75 | Outside | 1 HP | 1-3/4" | 1200 | 15 ³ / ₄ " x 5 ¹ / ₄ " x 1 ⁵ / ₈ " | 5.5 | 5.75 | 1/2" NPT ID | 83 | 3.69 |